



**SOLENO**

Mastering Storm Water

# TRIPLEFLO

## 4" (100 mm) Triple Wall Pipe

Rigid Pipe with Smooth Interior and Exterior Walls for Drainage Applications

### \*APPLICATIONS

- Drainage trench
- Foundation and basement drainage
- Drainage collector and outlet
- Turf and recreation drainage
- Septic leachfields
- Wire duct
- Downspout runoff

### FEATURES

- Available in 10' (3 m) lengths with a nominal diameter of 4" (100 mm) SDR or DR
- Increased resistance to sunlight, heat and UV rays due to the white outer wall
- Compatible with 4" (100 mm) PVC SDR or DR pipes
- Integrated bell
- Pipe stiffness greater than 30 psi (210 kPa)

### BENEFITS

- TripleFlo, made of high-density polyethylene (HDPE), stands out favorably from PVC pipes due to its cost and reduced environmental footprint
- HDPE has excellent resistance to breaks, cracks, splits, and impacts in cold weather
- Resistant to corrosion, abrasion, de-icing salts, and vibration
- Extremely durable and effective, the TripleFlo has a lifespan that can exceed 100 years
- Lightweight and easy to install
- Manning value: 0.009
- Consistent with PVC outer diameter per ASTM D2729 / CSA 182.1

**Compliant with  
ASTM F810**

**Made with over  
50% recycled plastics**



DISCOVER THE  
TRIPLEFLO >>>



**SOLENO.COM**



# SOLENO

Mastering Storm Water

# TRIPLE FLO


## 4" (100 mm) Triple Wall Pipe SPECIFICATIONS

### INSTALLATION

- For gravity-flow drainage applications, installation must comply to ASTM D2321
- Recommend backfill height: 1 foot (0.3 m) to 9.8 pi (3 m)
- \* Refer to local, regional and provincial agencies for specific regulations, standards, and guidelines. Soleno is not responsible for any improper use of its products.
- For leachfield applications, installations must comply with ASTM F481 and local, regional and provincial regulations

### STANDARD SHIPPING UNIT

- 90 lengths/unit
- 30 standard shipping units, totaling 27,000 linear feet (8230 LM), per drop deck truck
- Shipping unit weight: approximately 200 kg (440 lb)

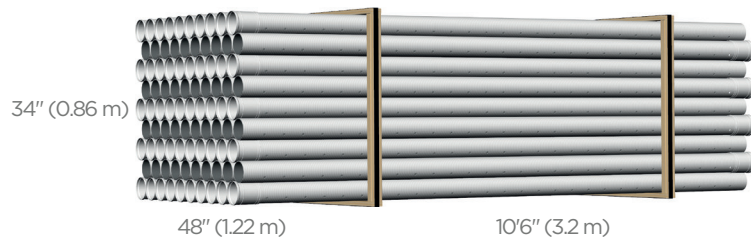

48" (1.22 m)

10'6" (3.2 m)


### PERFORATION TYPE

SKU	DESCRIPTION
3P04X10-4.8	TRIPLE WALL PIPE 4" (100mm) PERF 4-8 10' (3M) ASTM F810
3P04X10-4.8C	TRIPLE WALL PIPE 4" (100mm) PERF 4-8 10' (3M) BELL ASTM F810
3P04X10	TRIPLE WALL PIPE 4" (100mm) NON PERF 10' (3M) ASTM F810
3P04X10C	TRIPLE WALL PIPE 4" (100mm) NON PERF 10' (3M) BELL ASTM F810
*3P04X10-4.6.8	TRIPLE WALL PIPE 4" (100mm) PERF 4-6-8 10' (3M) ASTM F810
*3P04X10-4.6.8C	TRIPLE WALL PIPE 4" (100mm) PERF 4-6-8 10' (3M) BELL ASTM F810
*3P04X10-4.8.12	TRIPLE WALL PIPE 4" (100mm) PERF 4-8-12 10' (3M) ASTM F810
*3P04X10-4.8.12C	TRIPLE WALL PIPE 4" (100mm) PERF 4-8-12 10' (3M) BELL ASTM F810

\*Special Order

#### Model 4 - 8


Standard - In Stock



120deg

#### Model 4 - 6 - 8

Special Order




60deg

60deg

#### Model 4 - 8 - 12

Special Order



120deg

120deg